

FEATURES

Your right choice

- Ultra slim design
- Different frame designs and colors are available
- Easy and various installation styles
- Dimmable compatible with DALI
- Lighting sensors and Motion sensors are optional
- Customized sizes and special specification orders are accepted. Photometric data and IES files are available.
- Emergency battery pack last for 3 hours is available
- Customized size accepted
- 5 years guarantee for the panel
- 3 years guarantee for the driver
- Compliance to EN12464-1

LED Panel Lights PRO II Version

• CRI>80; 100lm/w; UGR19*; 12mm Thickness; SDCM<=4; 5 Years Guarantee (*Optional)

600x600mm



Part Number	Power	Color	Lumens	CRI	Beam
SL-PAN-35W-XW-AN2	35W	3000K/4000K/6000K	3200-3500	>80	120°
SL-PAN-40W-XW-AN2	40W	3000K/4000K/6000K	3600-4000	>80	120°
SL-PAN-50W-XW-AN2	50W	3000K-6000K CTA	4500-5000	>80	120°

620x620mm



Part Number	Power	Color	Lumens	CRI	Beam
SL-PAN-35W-XW-LS2	35W	3000K/4000K/6000K	3200-3500	>80	120°
SL-PAN-40W-XW-LS2	40W	3000K/4000K/6000K	3600-4000	>80	120°
SL-PAN-50W-XW-LS2	50W	3000K-6000K CTA	4500-5000	>80	120°

300x1200mm



Part Number	Power	Color	Lumens	CRI	Beam
SL-PAN-45W-XW-AN2	45W	3000K/4000K/6000K	3600-4000	>80	120°

600x1200mm



Part Number	Power	Color	Lumens	CRI	Beam
SL-PAN-45W-XW-BN2	45W	3000K/4000K/6000K	3600-4000	>80	120°
SL-PAN-70W-XW-BN2	70W	3000K/4000K/6000K	5000-5400	>80	120°

300x1500mm




Part Number	Power	Color	Lumens	CRI	Beam
SL-PAN-50W-XW-LN2	50W	3000K/4000K/6000K	4000-4500	>80	120°

XW:WWW 3000K /NW 4000K /PW 6000K

PRO - Superb PERFORMANCE

100 Efficiency	4 Light Guide	12 Thickness	5 Sidelight	4 SDCM	80 CRI	.95 PF	19 UGR
-------------------	------------------	-----------------	----------------	-----------	-----------	-----------	-----------

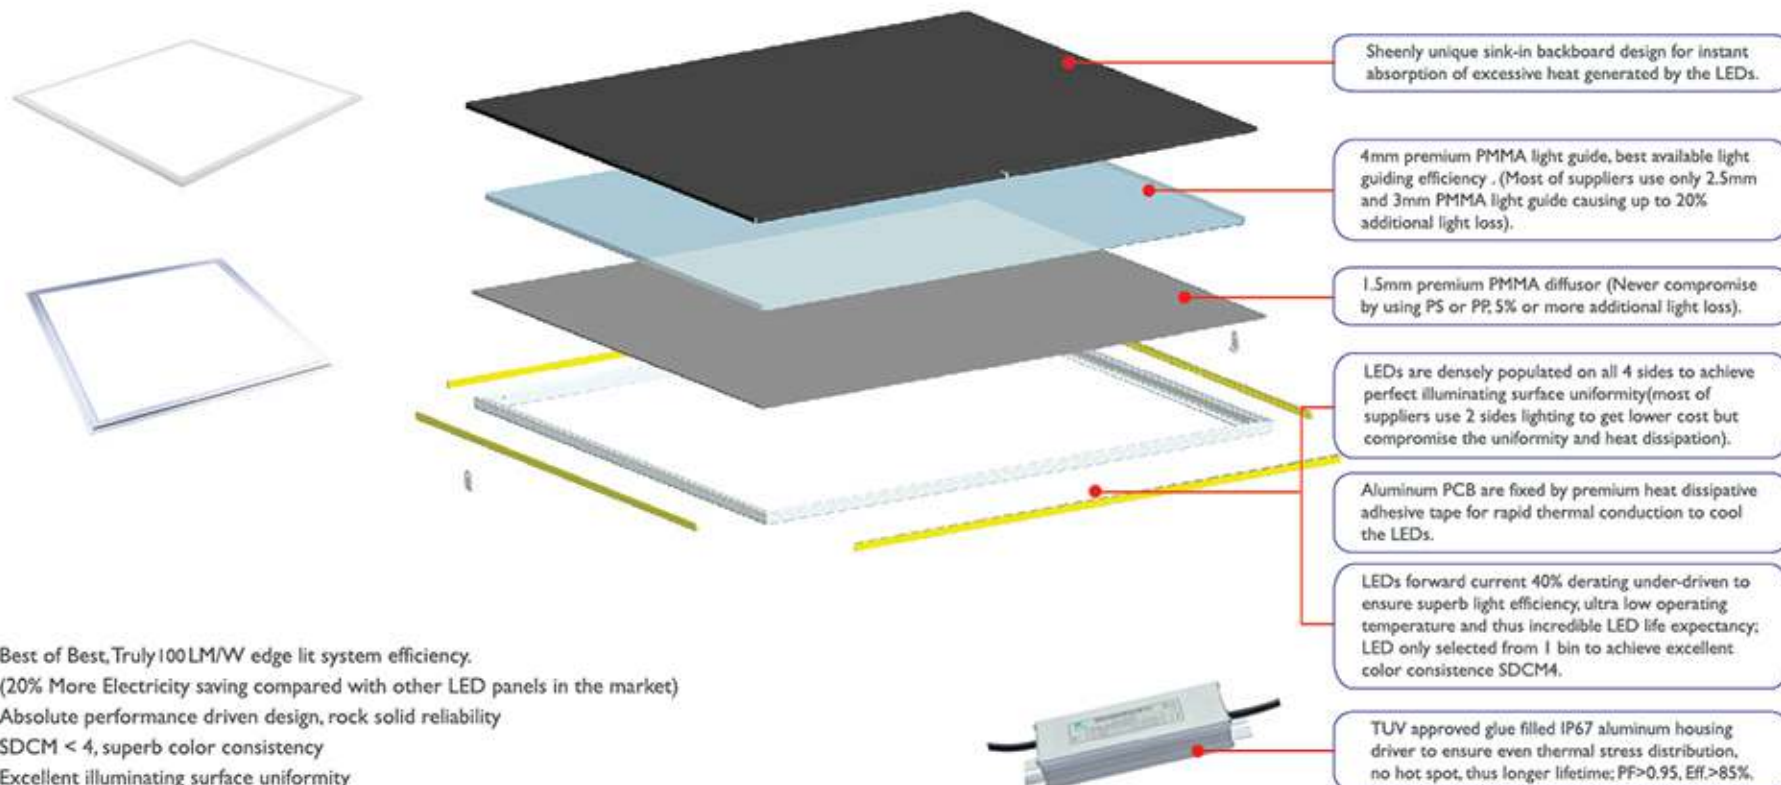

- Best of Best, Truly 100LM/W edge lit system efficiency.
- (20% More Electricity saving compared with other LED panels in the market)
- Absolute performance driven design, rock solid reliability
- SDCM < 4, superb color consistency
- Excellent illuminating surface uniformity
- Patented UGR 19 design *optional
- Extremely low operating temperature
- Attractive surface treatment
- Robust and rigid frame design, no bending or frame distortion
- TUV certified Glue-filled Aluminum Driver
- 5 Years Guarantee