



## LED DOWNLIGHT

### NORMS



# Flex

General Lighting Series (4" & 6")



## FEATURES

- Efficiency up to 95lm/W
- CRI80, good light quality
- UGR controlled
- 500lm, 1000lm & 2000lm lumen package, 4" & 6" Diameter models
- Simple robust and extremely reliable design, excellent cost versus performance ratio
- High transmission diffuser
- 30,000 hours lifetime
- Fully die-cast aluminum housing to ensure good heat dissipation, durable and impact proof
- Attractive surface treatment

### 4 INCH



Part Number	Power	Color	Lumens	Dimension(mm)	Beam
SL-DOW-09W-XW-F4	9W	3000K/4000K/6000K	850	Ø130*50 CutOut:100	80°
SL-DOW-12W-XW-F4	12W	3000K/4000K/6000K	1100	Ø130*50 CutOut:100	80°

XW:WW 3000K/ NW 4000K/ PW 6000K

### 6 INCH




Part Number	Power	Color	Lumens	Dimension(mm)	Beam
SL-DOW-12W-XW-F6	12W	3000K/4000K/6000K	1100	Ø180*50 CutOut:150	80°
SL-DOW-18W-XW-F6	18W	3000K/4000K/6000K	1650	Ø180*50 CutOut:150	80°
SL-DOW-24W-XW-F6	24W	3000K/4000K/6000K	2180	Ø180*50 CutOut:150	80°

XW:WW 3000K/ NW 4000K/ PW 6000K

## Applications

- Shops
- Restaurants
- Hotels
- Lobbies
- Office
- Meeting rooms
- Residential

## Dimension Inches [mm]

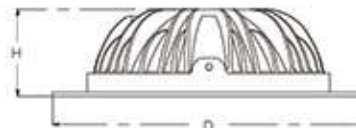

4INCH	D: 5.1" H: 2.0"	[D: 130 H: 50]
6INCH	D: 7.1" H: 2.0"	[D: 180 H: 50]

*Flexible for all demands*

