

Xline CE Version



Features

- High lighting efficiency, up to 100lm/W
- Powerful light output, up to 1500 lm/Meter
- Built-In Driver
- UGR<19, ideal light distribution for Office Lighting
- Super fast installation, suspended or surface mounted
- Connectable. Fast installation, suspended or surface mounted
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee

Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Warehouses
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms



Sheenly LED Linear Light

Sheenly's new LED Linear Light Xline is a unique and innovative product, which is the first edge lit linear panel with built-in driver. A hybrid of edge lit technology, with its extremely high efficiency and well controlled UGR, Xline is suitable to be used as a linear high-bay for work place and offices.

Specifications

Dimension (inches[mm])

| | |
|-----------|-----------------------------|
| 26W & 40W | 45.3"x2.2"x2.6"[1150*55*65] |
| 30W & 50W | 57.1"x2.2"x2.6"[1450*55*65] |

Power & Lumen Output

| | |
|-----|-----------------|
| 26W | 2600 lm @ 4000K |
| 30W | 3000 lm @ 4000K |
| 40W | 4000 lm @ 4000K |
| 50W | 5000 lm @ 4000K |

Color Temperature

| | |
|---------------|------------|
| Warm White | 3000 ±200K |
| Natural White | 4000 ±250K |
| Pure White | 5700 ±350K |

Color Rendering Index >80

Rated Life (L70) 50,000 Hours

Housing Aluminum

Beam Spread 90°

Operating Temperature -20°C to +60°C (Amb.)

Input Voltage 100-277V/AC

Power Factor >0.95

Net Weight 2.0 Kg


Glow Wire 650 °C (850°C Optional)

IP IP40


IK IK05

Installation Suspension
surface mounted

Dimension and Illumination Diagram

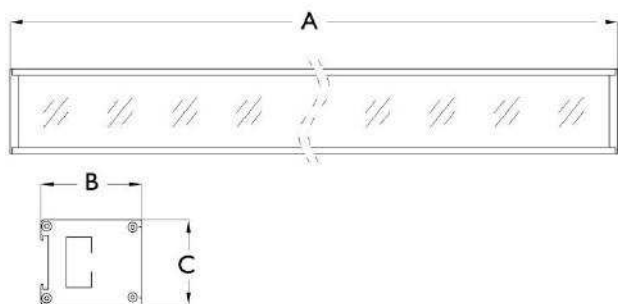

| | Dimension A (inches [mm]) | Dimension B (inches [mm]) | Dimension C (inches [mm]) |
|----------------------|------------------------------|------------------------------|------------------------------|
| 26W & 40W | 45.3[1150] | 2.6[65] | 2.2[55] |
| 30W & 50W | 57.1[1450] | 2.6[65] | 2.2[55] |

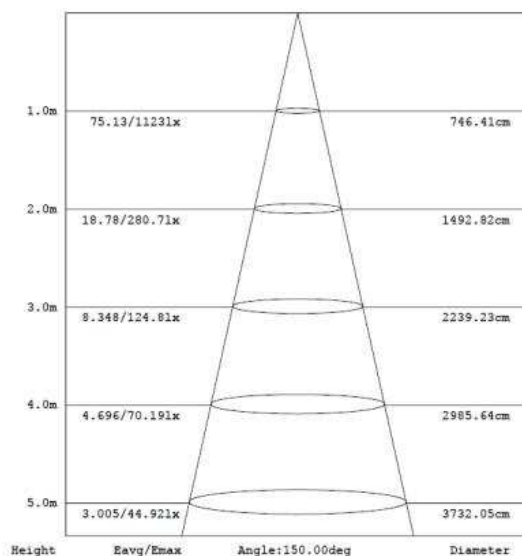

Ordering Information

| Sheenly | Class | Watt | CCT | Model |
|---------------------|-----------|--------------------------|---|-------|
| SL=Sheenly Lighting | XLN=Xline | 26W 30W 40W 50W | WW=3000 ±200K NW=4000 ±250K PW=5700 ±350K | N2 |

| Part Number | Power | CCT | Lumen Output | Beam | Dimension (inches[mm]) |
|----------------------|-------|-------------|--------------|------|-----------------------------|
| SL- XLN -26W- WW- N2 | 26W | 3000K ±200K | 2300 | 90° | 45.3"x2.2"x2.6"[1150*55*65] |
| SL- XLN -26W- NW- N2 | | 4000K ±250K | 2600 | 90° | |
| SL- XLN -26W- PW- N2 | | 5700K ±350K | 2600 | 90° | |
| SL- XLN -40W- WW- N2 | 40W | 3000K ±200K | 3800 | 90° | |
| SL- XLN -40W- NW- N2 | | 4000K ±250K | 4000 | 90° | |
| SL- XLN -40W- PW- N2 | | 5700K ±350K | 4000 | 90° | |
| SL- XLN -30W- WW- N2 | 30W | 3000K ±200K | 2800 | 90° | 57.1"x2.2"x2.6"[1450*55*65] |
| SL- XLN -30W- NW- N2 | | 4000K ±250K | 3000 | 90° | |
| SL- XLN -30W- PW- N2 | | 5700K ±350K | 3000 | 90° | |
| SL- XLN -50W- WW- N2 | 50W | 3000K ±200K | 4800 | 90° | |
| SL- XLN -50W- NW- N2 | | 4000K ±250K | 5000 | 90° | |
| SL- XLN -50W- PW- N2 | | 5700K ±350K | 5000 | 90° | |

Accessory



Suspension Kit:
Steel Cables, Screws, accessories, etc.



Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2015 Sheenly Lighting all rights reserved.

Available Type: Xline

Patten

