


## Up/Down Panel

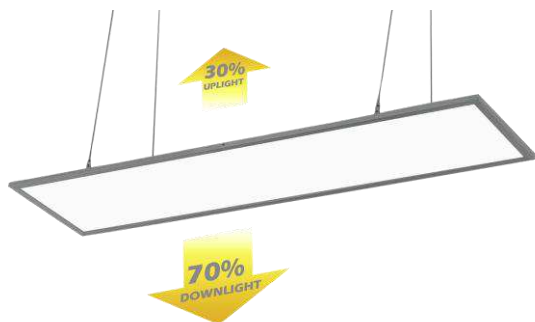

### Features

- Demand of premium high quality standards
- CRI >80, ErP compatible
- Ultra slim design
- Different frame designs and colors are available
- Easy and various installation styles
- Dimmable compatible with Dali
- Lighting sensors and Motion sensors are optional
- Emergency battery pack last for 3 hours
- Customized size accepted
- 5 years guarantee for the panel
- 3 years guarantee for the driver

### Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Hallway & lobbies
- Meeting Rooms

## Sheenly LED Up/Down Panel Light

Sheenly LED panel lights Pro version aim to the premium quality and high class design requirement applications, the features of up to 85 lm/w and UGR<19 can meet the most strict design and energy saving requirements in the world.


In the different approach, the design of Sheenly Pro Version LED panel lights emphasizes two keys of the series, high cost effective and meet requirements. Pro version meets most of normal design requirements with competitive cost.

### Specifications

<b>Dimension (mm)</b>	295 x1195x14mm
<b>Power &amp; Lumen Output</b>	
UP	1000 lm @ 4000K
DOWN	2400 lm @ 4000K
<b>Color Temperature</b>	
Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L70)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Optics</b>	Opal
<b>Beam Spread</b>	120°
<b>Operating Temperature</b>	-20°C to +45°C (Amb.)
<b>Input Voltage</b>	220-240V/AC
<b>Power Factor</b>	>0.95
<b>Flatness</b>	<1.5mm
<b>Working Voltage &amp; Current</b>	33±2 V/DC & 1050mA
<b>Net Weight (Includes Driver)</b>	4.45±0.1kg
<b>Glow Wire</b>	650 °C (850°C optional)
<b>IP</b>	IP40
<b>IK</b>	IK05
<b>Installation</b>	Suspension



## Dimension [mm]

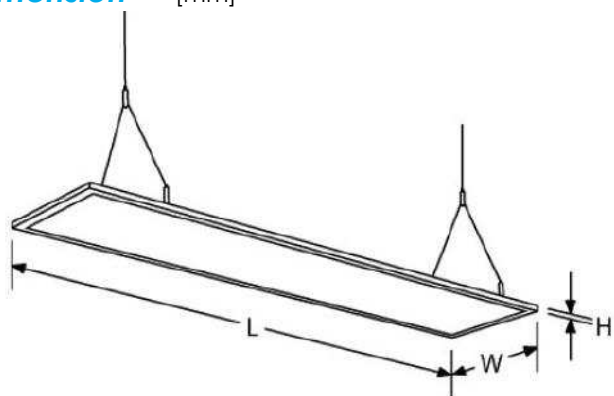

Dimension L (mm)	Dimension W (mm)	Dimension H (mm)
1195±1	295±1	14±0.5

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	<b>45W</b>	<b>WW</b> =3000 ±200K <b>NW</b> =4000 ±250K <b>PW</b> =5700 ±350K	<b>UD</b>	<b>BK</b> =Black <b>WH</b> =White <b>SI</b> =Silver	<b>UD= Up/Down</b>

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-PAN-45W-WW-UD	45W	3000±200K	Up: 950 Down: 2200	120°	295 x1195 x14
SL-PAN-45W-NW-UD		4000±250K	Up: 1000 Down: 2400		
SL-PAN-45W-PW-UD		5700±350K	Up: 1100 Down: 2500		

## Accessory



Installation Fixtures,  
**SL-ACC-PEN-SQUARE**

\*All specifications subject to change without notice.

©2009-2015Sheenly Lighting all rights reserved.

## I. Suspension Rope

Available Type:  Up/Down LED panel light (300x1200mm)

**Step 1**

Dimension	A(mm)	B(mm)	C(mm)
Plinx 900			
Plinx 1200	610	220	35
Plinx 1500			

**Step 2**

**Step 3**

**Step 4**

**Step 5**

**Step 6**

**Step 7**

X4 X4 X2 X2 X2 X2 X2 X4

**Lighting Up  
a New World**