


Special & Functional

Up and Down
Color Temperature Adjustable
RGB

UP DOWN PANELS



| Part Number | Power | Color | Lumens | Beam | Dimension(mm) |
|------------------|-------|-------|-------------|---------|---------------|
| SL-PAN-45W-WW-UD | 45W | 3000K | 1950 12200 | Up/Down | 295×1195×14 |
| SL-PAN-45W-NW-UD | 45W | 4000K | 11000 12400 | Up/Down | 295×1195×14 |
| SL-PAN-45W-PW-UD | 45W | 6000K | 11100 12500 | Up/Down | 295×1195×14 |

COLOR TEMPERATURE ADJUSTABLE(CTA) PANELS



| Part Number | Power | Color | Lumens | Beam | Dimension(mm) |
|------------------|-------|-----------------|--------|------|---------------|
| SL-PAN-20W-BW-AN | 20W | 3000K-6000K CTA | 1300 | 120° | 295×295×12 |
| SL-PAN-50W-BW-AN | 50W | 3000K-6000K CTA | 4200 | 120° | 595×595×12 |
| SL-PAN-50W-BW-LS | 50W | 3000K-6000K CTA | 4200 | 120° | 618×618×12 |

RGB PANELS



| Part Number | Power | Color | Lumens | Beam | Dimension(mm) |
|------------------|-------|-------|--------|------|---------------|
| SL-PAN-25W-TC-XS | 25W | RGB | 300 | 120° | 295×295×12 |
| SL-PAN-50W-WT-XS | 50W | W+RGB | 2400 | 120° | 295×295×12 |

ALL RIGHTS RESERVED
PATENTED
ALL RIGHTS RESERVED



Special Back Design

PN:SL-PAN-45W-BW-UD-MP

30% Up / 70% Down / Direct and Indirect Lighting

CRI>80, UGR<19, SDCM<4, 85lm/W, Color Temperature Adjustable

5 years guarantee for the panel,

PF>0.95, ErP A+



Certificates: ISO9001, CE, RoHS, REACH, ErP, Glow-wire test 850°
lead time: 25 days

LED ROUND PANEL LIGHT

NORMS




R580

Up/Down Lighting Optional



Dimension Inches [mm]

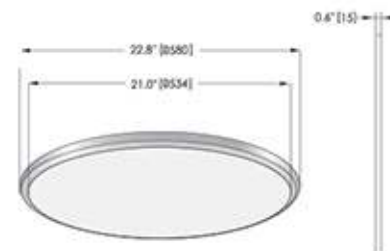

R580 LED ROUND PANEL

| Part Number | Power | Color | Lumens | Beam | Dimension(mm) |
|--------------------|-------|-------------------|--------|------|---------------|
| SL-PAN-40W-XW-R.60 | 40W | 3000K/4000K/6000K | 3400 | 120° | Ø580×15 |
| SL-PAN-60W-XW-R.60 | 60W | 3000K/4000K/6000K | 5000 | 120° | Ø580×15 |

R580 LED ROUND PANEL UP AND DOWN

| Part Number | Power | Color | Lumens | Beam | Dimension(mm) |
|--------------------------|-------|-------------------|---------------|------------------------|---------------|
| SL-PAN-40W-XW-R.60-UD-TP | 40W | 3000K/4000K/6000K | 11700 11700 | Up/Down Transparent | Ø580×15 |
| SL-PAN-60W-XW-R.60-UD-TP | 60W | 3000K/4000K/6000K | 12500 12500 | Up/Down Transparent | Ø580×15 |

XW:WW 3000K, WW 4000K, WW 6000K.